

FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES


4000 Series Compact Utility Tractor - 4210, 4310, 4410

FILTER KIT

[LVA21194](#)

M806419, MIU804763, LVA11522, LVA10419, M131802

Each kit contains above filter, offering a complete solution for your maintenance needs to keep your tractor running at peak performance.

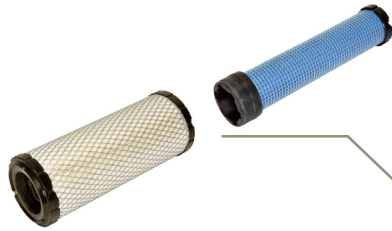

ENGINE
PRIMARY AIR FILTER
[M131802](#)
SECONDARY AIR FILTER
[M131803](#)

Check after every 500 hours and replace as needed.



ENGINE
FUEL FILTER
[MIU804763](#)

Replace after every 500 hours.



ENGINE
OIL FILTER
[M806419](#)

Replace initially after 50 hours and after every 200 hours.

(Click here for [capacity](#))



TRANSMISSION
OIL FILTER
[AM102723](#) – (CLUTCH HOUSING)

HYDRAULIC
OIL FILTER
[LVA10419](#) – (HST)
[LVA11522](#) – (TRANSMISSION LINES)

Replace initially after 50 hours and after every 400 hours.

(Click here for [capacity](#))



JOHN DEERE
Genuine Parts and Service

https://www.deere.com/en_US/parts/parts_by_industry/ag/fmi/filter_maintenance_information.page

CAPACITIES

4000 Series Compact Utility Tractor - 4210, 4310, 4410

CAPACITIES (Approximate):

Fuel Tank:

..... 37.9 L (10 gal)

**Cooling System:
Cool-Gard™ II**

4210..... 5.3 L (1.4 gal)
4310, 4410..... 5.7 L (1.51 gal)

**Engine Crankcase W/ Filter:
Plus-50™ II**

4210..... 3.8 L (1 gal)
4310, 4410..... 4.3 L (1.14 gal)

**Transmission and Hydraulic System:
Hy-Gard™**

4210, 4310, 4410 (Gear Models)..... 24 L (6.3 gal)
4210, 4310, 4410 (Hydrostatic Models)..... 26 L (6.9 gal)

**FRONT AXLE:
Low Viscosity Hy-Gard™**

4210, 4310, 4410..... 4.5 L (1.19 gal)

[Return to Filter Overview](#)

