

REPLACEMENT PARTS GUIDE

Z920R Z-Trak™ R Series Mower

ENGINE



OIL FILTER

[AM125424](#)

Change every 100 Hrs.



ENGINE OIL

[TY22029](#) (Turf-Gard™ - 10W-30) (With Filter)
(2.0 L (2.1 qt))

Change every 100 Hrs.



AIR FILTER

[M131802](#) (PRIMARY)

Change every 300 Hrs.

[M131803](#) (SECONDARY)

Change every 500 Hrs.



MULTI - PURPOSE SD POLYUREA GREASE

[TY6341](#)

GREASE GUN

[TY26518](#)

Change As Required.



FUEL FILTER

[UC21217](#)

Change every 300 Hrs.



SPARK PLUG

[M805853](#)

Change every 1000 Hrs.



ELECTRICAL



IGNITION SWITCH

[TCA22740](#) (S/N (- 070000))

[AUC18708](#) (S/N (070001-))



HEADLIGHT BULB

[AM118013](#) (37.5 W)



IGNITION KEY

[AUC12681](#)



BATTERY

[TY25221B](#) (12 V) (FOR CANADA AND USA)

[MCYP340PF](#) (12 V) (NOT FOR CANADA
AND USA)

FUEL & AIR



FILLER CAP

[TCA23672](#)



MUFFLER

[TCA21568](#)

TRANSMISSION/ HYDRAULIC



HYDRAULIC OIL FILTER

[MIA881446](#)

Change every 500 Hrs After 300 hour Initial
Break In










TRACTION DRIVE BELT


[TCU34299](#) (LGTH = 1803.9 mm,
WIDTH = 16 mm)





REPLACEMENT PARTS GUIDE

Z920R with 48 inch Deck

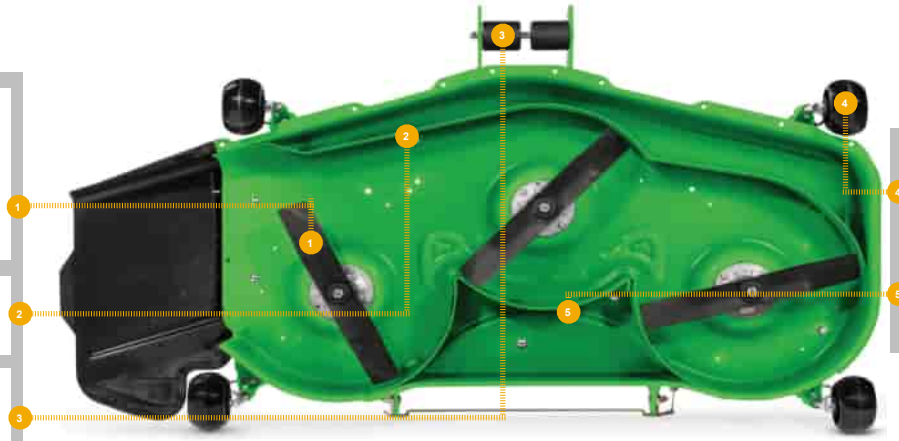


| | |
|---|---|
|  | MOWER BLADE |
|  | M136194 (STANDARD LIFT) |
|  | TCU30315 (HIGH LIFT) |
|  | UC15159 (HIGH LIFT SELF SHARPENING) |
|  | TCU18678 (LOW LIFT) |
|  | MULCH BLADE |
| | M136185 |
|  | ROLLER |
| | TCU34060 |






| | |
|---|--|
|  | GAGE WHEELS |
| | UC28193 |
|  | V BELT |
| | TCU30510 (LGTH 4119 mm, WIDTH = 14 mm) |

REPLACEMENT PARTS GUIDE

Z920R with 54 inch Deck
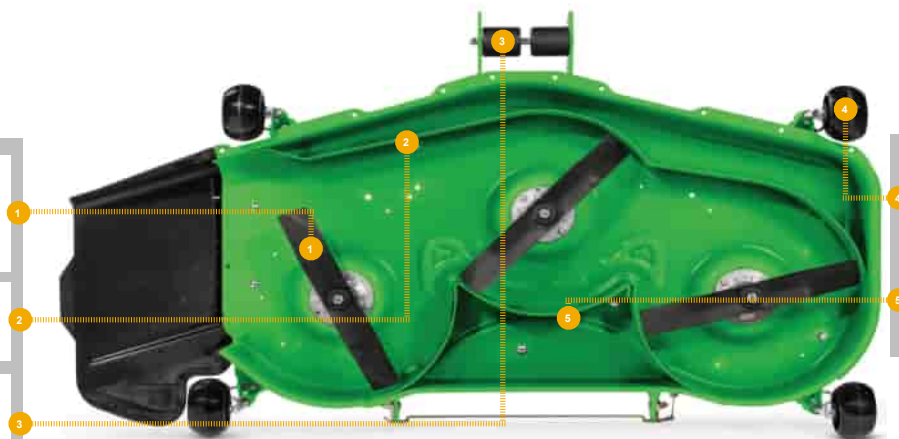
| | |
|---|--|
|  | MOWER BLADE TCU30317 (HIGH LIFT) TCU30316 (STANDARD LIFT) |
|  | MULCH BLADE M135334 |
|  | ROLLER TCU34060 |



| | |
|---|---|
|  | GAGE WHEELS UC28193 |
|  | V BELT TCU31132 (LGTH = 4337 mm, WIDTH = 14 mm) |