

REPLACEMENT PARTS GUIDE

CS690 Cotton Stripper

CAB

RECIRCULATION AIR FILTER [H220870](#)



Clean or replace every 250 hours or as required. If operating in dusty conditions clean daily.

FRESH AIR FILTER [AH115833](#)



Clean or replace every 50 hours or as required. If operating in dusty conditions clean daily.

TRANSMISSION

OIL FILTER [AH128449](#)



Replace every 1000 hours.

ENIGNE

OIL FILTER [RE572785](#)



Minimum hours before first engine oil change is 100 hours. Extended engine oil change every 500 hours or annually, whichever comes first. The extended 500 hour interval is only allowed if using Plus-50™ II oil with a John Deere filter and diesel fuel with sulfur content less than 15mg/kg (15ppm). If all conditions are not met, change oil and filter at 250 hours of operation.

DEF BREATHER [H216169](#)



Replace after first 4500 hours.

DIESEL EXHAUST FLUID DOSING FILTER [DZ114640](#)



Replace after first 4500 hours.

ENIGNE

SECONDARY FUEL FILTER [DZ112918](#)



Replace every 400 hours or annually, whichever occurs first.

PRIMARY FUEL FILTER [RE539465](#)



Replace every 400 hours or annually, whichever occurs first.

AIR FILTER SAFETY ELEMENT [AH212295](#)



Replace every 400 hours or annually, whichever occurs first.

AIR CLEANER PRIMARY ELEMENT [AH222225](#)



Replace every 400 hours or annually, whichever occurs first.

HYDRAULICS

PUMP DRIVE GEARBOX OIL FILTER [LVA10419](#)



Replace every 1000 hours.

HEADER CLEANER PUMP FILTER [AH128449](#)



Replace every 1000 hours.
CHASSIS RETURN OIL FILTER
[AH128449](#)

Replace every 1000 hours.

PRIMARY RETURN OIL FILTER [RE210857](#)




Replace every 1000 hours.

PROPEL SYSTEM OIL FILTER [AN373366](#)



Replace every 1000 hours.

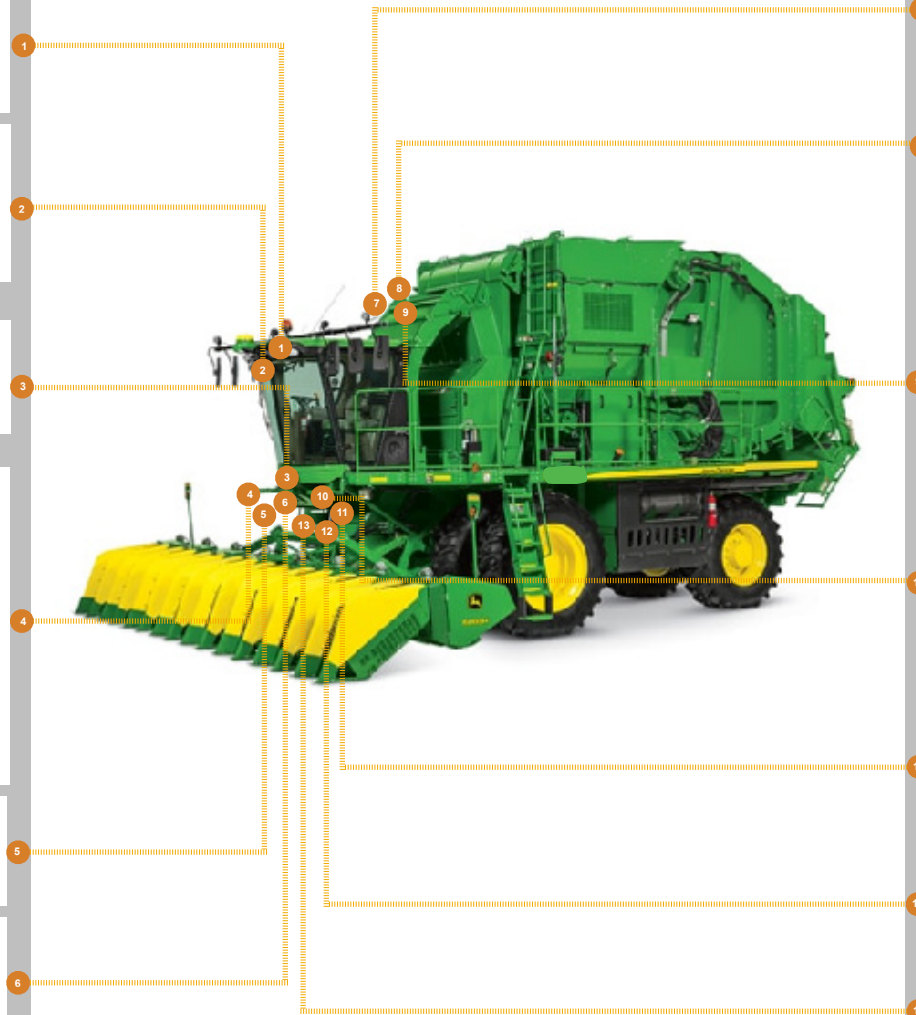

CAPACITIES

CS690 Cotton Stripper

CAPACITIES (Approximate):

Fuel Tank:

..... 1022 L (270 gal)

Diesel Exhaust Fluid Tank:**Diesel Exhaust Fluid**

..... 60.5 L (16 gal)

Auxiliary Water Tank:

..... 258 L (68 gal)

Cooling System:**Cool-Gard™ II**

..... 70 L (18.5 gal)

Engine Crankcase (Includes Filter):**Plus-50™ II**

..... 43 L (11.4 gal)

Hydraulic Oil Reservoir:**Hy-Gard™**

..... 189 L (50 gal)

Hydraulic and Hydrostatic System:**Hy-Gard™**

..... 276 L (73 gal)

ProDrive™ Transmission and Brake System:**Hy-Gard™**

..... 19 L (5 gal)

Final Drive: (2 Used)**GL-5**

..... 7.8 L (2 gal)

Pump Drive Gearbox:**Hy-Gard™**

..... 15.1 L (4 gal)

Row Unit Gear Case: (6 Used)**Hy-Gard™**

..... 0.7 L (0.18 gal)

Rear Axle Main Body Housing:**GL-5**

..... 9.9 L (2.6 gal)

Rear Axle Auxiliary Gearbox:**GL-5**

..... 1.3 L (0.34 gal)

Rear Axle Planetary: (2 Used)**GL-5**

..... 3.8 L (1 gal)

REPLACEMENT PARTS GUIDE

CS690 Cotton Stripper

ROUND MODULE BUILDER (RMB)



ROUND MODULE BELT CLIP

[AE53298](#) (Narrow Belt)
[AKK25568](#) (Wide Belt)



ROUND MODULE BELT PIN

[E86147](#) (Narrow Belt)
[KK36931](#) (Wide Belt)



ROUND MODULE BELTS, SLIM

[AN375249](#)
[AN373217](#)

ROUND MODULE BELTS, WIDE

[AN375248](#)
[AKK23004](#)



ACCUMULATOR SECOND AUGER KIT

[BKK10333](#)



SPRING TENSION FEEDER BELT

[AKK21021](#)
[AKK32901](#)

Prevents belt slippage, easier to set tension.



ACTIVE RMB BRUSH

[BKK10319](#)

Improved RMB cleaning in tough conditions.



SLOTTED WRAP FINGER GUIDES

[KK48932](#)
[KK48933](#)
[KK48934](#)

Reduced potential wrap misfeed and wrap tearing.



ROLLER BRUSH RETAINER

[KK26412](#)



ROUND MODULE BUILDER (RMB)



ROLLER BRUSH BELT

[KK27048](#)



ROLLER BRUSH

[KK72056](#)



ROCKSHAFT GUIDES

[KK37516](#)



WRAP ROLLER DRIVE V-BELT

[L4490N](#)



WRAP ROLLER DRIVE CHAIN

[KK28234](#)



FRONT LOWER PULLEY

[AKK11649](#)



RMB WRAP FLOOR BELT

[N377281](#)



GROOVED WRAP ROLLER


[AKK21133](#)


Reduce wrap misfeeds caused by wrapping rear roller.





REPLACEMENT PARTS GUIDE


CS690 Cotton Stripper


- 


CLEANER & FEEDER PADDLE
[AN406184](#)
- 


CLEANER & FEEDER AUGER
[AN406373](#)
- 

CLEANER DOFFER ASSEMBLY
[AN405209](#)
- 

CLEANER DOFFER BRUSH
[AN221023](#)
- 


CLEANER SAW ASSEMBLY
[AN405199](#)
- 


CLEANER SAW SEGMENTS
[N221590](#)
- 


CLEANER SAW BEARINGS
[AN220646](#)
- 

CLEANER BRUSHES
[AN123628](#)
[AN221683](#)
[AN220747](#)



- 

CLEANER DRIVE V BELT
[N115368](#)
[N33746](#)
- 

CLEANER DRIVE V BELT SET
[AKK14894](#)
- 

CLEANER CLUTCHES
[N221610](#)
[N221611](#)
[N221993](#)
[N125300](#)

REPLACEMENT PARTS GUIDE

CS690 Cotton Stripper



ROW UNIT BRUSH

[KK72054](#)
[KK72055](#)
[KK72056](#)

Ensures consistent stripping.



LH AND RH RETAINER

[N125408](#)



AUGER

[AN221692](#) (RH)
[AN221693](#) (LH)



CROSS AUGER ASSEMBLY

[BKK10691](#)



CROP GUIDES SUPPORT

[AKK26977](#) (RH)
[AKK26976](#) (LH)



CROP GUIDES SHOE

[N220836](#) (RH)
[N220837](#) (LH)



DRIVE BELT SET

[AKK17996](#)



CROP GUIDES STRAP

[N220186](#)



CROP GUIDES BAR

[N221256](#) (RH)
[N221257](#) (LH)



HEIGHT SENSING ROD

[N223457](#)



CROP GUIDE BUSHINGS

[M93425](#)



LH AND RH BAT/FLAP

[AN123821](#)

Ensures consistent stripping.



JOHN DEERE

Genuine Parts and Service

CLICK PART NUMBER TO BUY

*See operator's manual for additional details.