

REPLACEMENT PARTS GUIDE

W650 COMBINE (MY 2014 – 2015)

CAB

FRESH AIR FILTER

[RE284091](#)

Clean or replace every 50 hours and as required

RECIRCULATION AIR FILTER

[L214634](#)

Clean and Replace as required

ENGINE

FUEL PRECLEANER FILTER

[R502778](#)

PREMIUM FUEL PRECLEANER FILTER

[N378886](#)

Drain every 50 hours or weekly

DIESEL EXHAUST FLUID LINE

[DZ100304](#)

Change every 4500 hours or Diagnostic Trouble Code (DTC) generated

FINAL TIER 4 PRIMARY FUEL FILTER

[RE20906](#)

SECONDARY FUEL FILTER

[RE525523](#)

Change as require or when Diagnostic Trouble Code (DTC) is generated

HYDRAULIC OIL FILTER VENTILATION SYSTEM


[AL203061](#)

Change after every 400 hours or ever year

MAIN ENGINE GEARCASE FILTER (PRODRIVE™ TRANSMISSION)

[AH128449](#)

Change after first 100 hours.

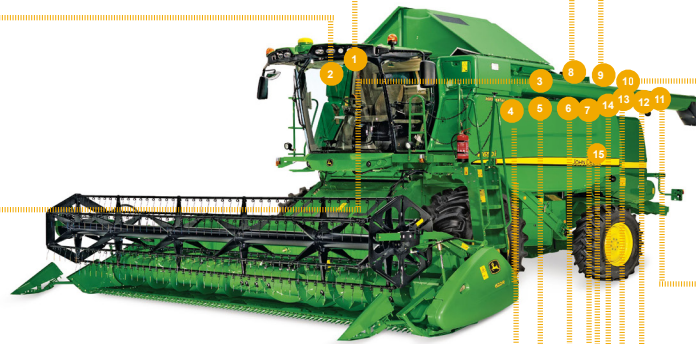

ENGINE

ENGINE

FUEL FILTER (STANDARD)

[RE541922](#)

Change as require or when Diagnostic Trouble Code (DTC) is generated.

OIL FILTER

[RE509672](#)

Change after every 250 hours or every year.

MAIN ENGINE GEARCASE FILTER

[CE19990](#)

Change after every 400 hours or every year

DIESEL PARTICULATE FILTER

[DZ100484](#)

Change every 4500 hours or Diagnostic Trouble Code (DTC) generated

LONG FILTER PRIMARY AIR FILTER

[AH164062](#)

SECONDARY AIR FILTER

[AH164063](#)

Change as require or when Diagnostic Trouble Code (DTC) is generated.

SHORT FILTER PRIMARY AIR FILTER

[AH148880](#)

SECONDARY AIR FILTER

[RE525523](#)

Change as require or when Diagnostic Trouble Code (DTC) is generated..

FUEL FILTER (TIER 2)

[RE522878](#)

Check Every 4500 hours or Diagnostic Trouble Code (DTC) is generated..

OIL FILTER (TIER 2)

[RE504836](#)

Change after first 100 hours.

CAPACITIES

W650 Combine (MY 2014 – 2015)

CAPACITIES (Approximate):

Fuel Tank:

..... 800 L (210 gal)

Grain Tank

..... 9000 L (2378 gal)

Cooling System with Heater:

(Cool-Gard II)-Tier 2

..... 40 L (10.56 gal)

Cooling System with Heater:

(Cool-Gard II)-Tier 4

..... 45 L (11.88 gal)

Engine Crankcase with Filter

(Plus-50™ II)-Tier 2

..... 32 L (8.45 gal)

Engine Crankcase with Filter

(Plus-50™ II)-Tier 4

..... 29 L (7.6 gal)

Transmission

(3-Speed Mechanical Shift and Push Button Shift) –

(GL-5)

..... 7 L (1.85 gal)

Final Drive (GL-5)

..... 7 L (1.85 gal)

Engine Gearcase with Transfer

(3-Speed Mechanical Shift and Push Button Shift Machines) –

(Hy-Gard™)

..... 16 L (4.22 gal)

Engine Gearcase with Transfer

(ProDrive™ Machines) –(Hy-Gard™)

..... 20 L (5.25 gal)

Hydraulic System Reservoir

(Hy-Gard™)

..... 34 L (9.51 gal)

Feeder house reverser gear case

(ISO VG 460 Fully Synthetic)

..... 2 L (0.5 gal)

Countershaft drive gear case

(GL-5)

..... 1.2 L (0.32 gal)

Loading Auger Gearcase (GL-5)

..... 3.8 L (1 gal)

REPLACEMENT PARTS GUIDE

W650 COMBINE

THRESHING

MY11-22

AZ58905 – RASP BARS

Paired by weight with deep heat treatment for excellent threshing, good drum balancing and long lifetime.



MY11-22

AXE53048 - UNIVERSAL CONCAVE

MY16-18

AXE68166 - HIGH DIVERSITY UNIVERSAL CONCAVE



AXE53100 - SMALL GRAIN CONCAVE

MY16-18

AXE68169 - HIGH DIVERSITY SMALL GRAIN CONCAVE

Exactly welded for easy adjustment and perfect threshing.



MY19-22

AXE59411 - HIGH-VERSATILITY CONCAVE

AXE59379 - CONCAVE INSERT SMALL GRAIN

AXE59409 - CONCAVE INSERT SMALL GRAIN

BXE10909 - ROUND BAR CONCAVE INSERT KIT

High versatility with easy-to-exchange inserts.



STRAW CHOPPER

PREMIUM KNIVES

Induction hardened to resist wear and tear at the punched hole and the cutting edge.

MY11-15

Z103205 - PREMIUM CHOPPER SERRATED KNIFE



MY11-22

Z105500 - PREMIUM CORN SERRATED KNIFE



MY11-15

Z75874 - PREMIUM CHOPPER STATIONARY KNIFE



STANDARD KNIVES

Induction hardened to resist wear and tear at the punched hole and the cutting edge.

MY11-15

Z77601 - STANDARD CHOPPER SERRATED KNIFE



MY11-22

Z53454 - STANDARD CHOPPER SMOOTH KNIFE



MY11-15

Z42176 - STANDARD CHOPPER CORN KNIFE



HXE13024 - STANDARD CHOPPER STATIONARY KNIFE SMOOTH



MY16-22

HXE13023 - STANDARD CHOPPER STATIONARY KNIFE SERRATED



REPLACEMENT PARTS GUIDE

W650 COMBINE

FEEDERHOUSE

OUTER CHAIN

Made for smooth running, resisting load spikes and minimal elongation.



MY11-15

[AZ63336](#)



[AZ102573](#) (HEAVY DUTY)



MY16-22

[AXE41939](#)

INNER CHAIN

Made for smooth running, resisting load spikes and minimal elongation.



MY11-15

[AZ63337](#)



[AZ102574](#) (HEAVY DUTY)



MY16-22

[AXE41940](#)



GRAIN HANDLING

MY11-22

[AZ101808](#) - CLEAN GRAIN ELEVATOR CHAIN

Made for smooth running, resisting load spikes and minimal elongation.



STRAW WALKER

MY11-15

[AZ45586](#) - BEARING

Original John Deere bearings don't warp, open, crack or break, nor will they seize on the shaft.

