FILTER OVERVIEW WITH SERVICE INTERVALS
7050 Series Self-Propelled Forage Harvester

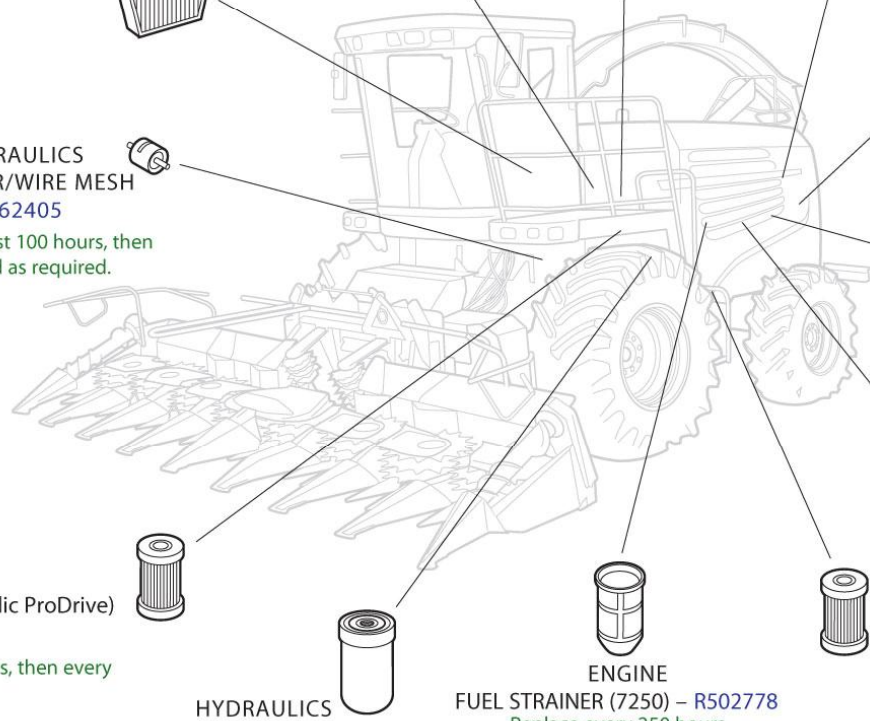

CAB
FRESH AIR FILTER, HEAVY DUTY (7250-7850) – AH168783
AIR FILTER, STANDARD (7250-7850) – AH115833
Replace as required.

CAB
RECIRCULATION AIR FILTER
(7250-7850) –AH115836
Clean as required.

HYDRAULICS
TRANSMISSION OIL FILTER (Hydraulic ProDrive)
(7250-7850) – AZ101001
Replace after the first 100 hours, then every 250 hours and as required.

ENGINE
SECOND. AIR FILTER (7250-7350) – AZ45867
SECOND. AIR FILTER (7450-7850) – AZ61134
Replace every 1,500 hours and as required.

ENGINE
PRIMARY AIR FILTER
(7250-7350) – AZ45868
(7450 - 7850) –AZ61133
Replace every 1,500 hours and as required

ENGINE
COOLANT FILTER (7850) –PMWF2126
Replace every 250 hours.

HYDRAULICS
HYDRAULIC FILTER/WIRE MESH
(7250-7850) –AZ62405
Replace after the first 100 hours, then every 250 hours and as required.

ENGINE
OIL FILTER (7250) – RE509672
(7350 - 7750) – RE58935
(7850) – PMLF9000
Replace after 100 and 250 hours, and then every 250 hours and as required.

If John Deere Plus-50engine oil and a John Deere oil filter are used, the oil and filter change interval may be extended by 50 percent or to 375 hours.

ENGINE
FUEL FILTER (7250) – RE522372
FUEL FILTER (7350-7700) – RE507284
FUEL FILTER (7850) – PMFS1007
Replace every 250 hours.

HYDRAULICS
TRANSM. OIL FILTER (Hydraulic ProDrive)
(7250-7850) – AL112936
Replace after the first 100 hours, then every 250 hours and as required.

HYDRAULICS
HYDROSTATIC CHARGE FILTER, 4Gear and IVLOC (7250-7850) – AH128449
Replace after the first 100 hours, then every 250 hours and as required.

ENGINE
FUEL STRAINER (7250) – R502778
Replace every 250 hours.

HYDRAULICS
HYDRAULIC OIL FILTER
(7250-7850) –AZ64238
Replace after first 100 hours, then every 250 hours and as required.

April 2008. Subject to change without notice.